




SCHEDE TECNICHE PRODOTTI



www.picenia.com

**AUTOTRASFORMATORE
TRIFASE**

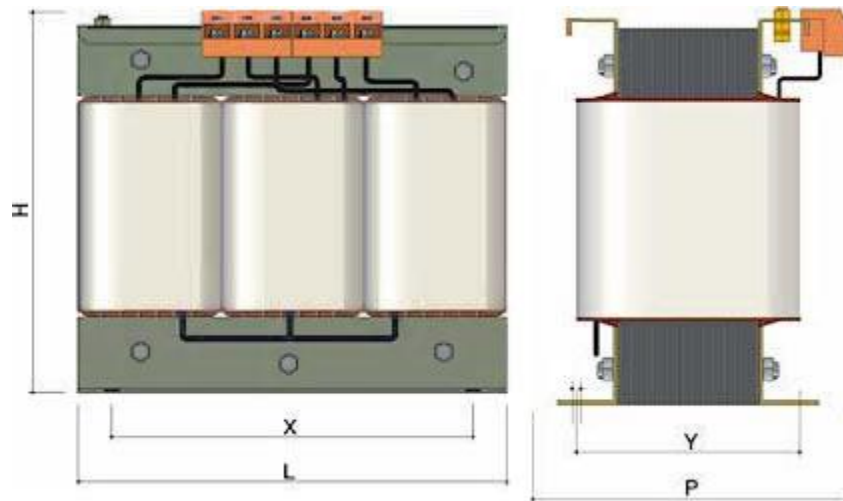



POTENZA VA	L	P	DIMENSIONI H	X	Y	Peso Kg.
500	180	70	170	150	55	2.8
1000	180	80	170	150	60	3.9
1500	180	85	170	150	65	6.5
2000	180	90	170	150	70	7.5
2500	180	98	170	150	77	8.9
3000	180	107	170	150	86	9.5
3500	180	116	170	150	96	12
4000	180	125	170	150	113	15
5000	240	110	250	200	90	17
6000	240	122	250	200	100	19
7500	240	131	250	200	110	23
8000	240	136	250	200	110	24
10000	240	153	250	200	128	30
12500	300	110	300	250	94	35
15000	300	120	300	250	105	38
20000	300	124	300	250	105	43
25000	300	155	300	250	136	53
30000	360	160	350	325	135	67
40000	360	180	350	325	154	89
50000	420	195	410	375	130	105
70000	420	260	410	375	160	130

TRASFORMATORE
USO ELETTROMEDICALE

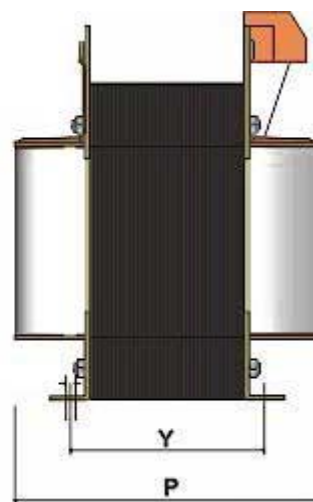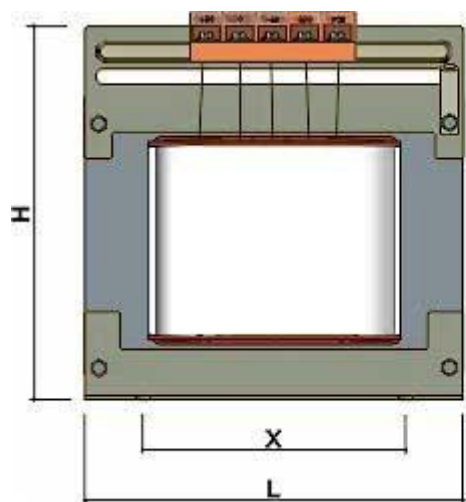


POTENZA VA	L	P	DIMENSIONI H	X	Y	Peso Kg.
30	75	60	88	55	45	1.3
50	84	62	98	75	55	1.2
80	84	82	98	75	55	2.1
100	96	82	110	85	65	2.3
160	96	98	110	85	82	2.8
250	120	95	130	95	65	4.6
400	120	125	130	95	75	5
630	150	120	150	104	75	7.6
1000	150	160	150	104	75	9.5
1600	198	160	190	131	85	14.8
2500	198	200	190	131	155	19
4000	200	150	300	150	140	30
6300	240	150	350	210	130	45
7500	240	170	350	210	150	55
10000	280	200	400	240	130	70

**TRASFORMATORE
DI ISOLAMENTO**

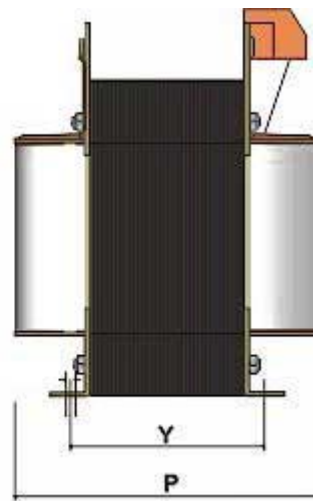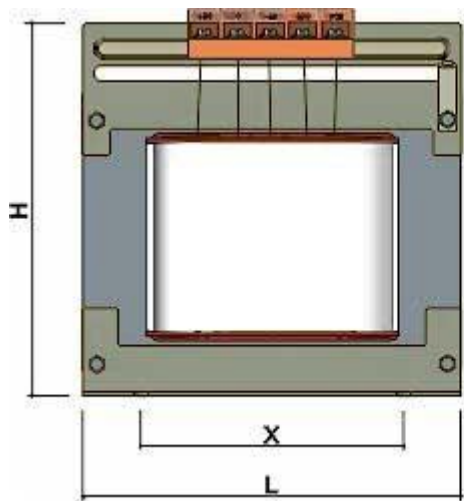



POTENZA VA	L	P	DIMENSIONI H	X	Y	Peso Kg.
30	75	70	78	55	40	0.85
50	75	80	78	55	50	1.10
80	85	80	90	60	52	1.52
100	85	90	90	60	62	1.8
150	96	90	95	68	65	2.15
200	110	100	100	90	60	3
250	110	110	100	90	75	3.50
300	110	110	100	90	75	3.8
400	120	110	130	80	80	4.5
500	120	120	130	80	90	5.3
630	120	130	130	80	100	6.4
800	150	125	170	105	90	7.8
1000	150	145	170	105	100	9
1500	150	175	170	105	130	14.5
2000	180	160	190	130	140	18
3000	180	170	190	130	150	21
4000	200	160	280	150	110	28
5000	200	170	280	150	120	30
7500	240	190	320	205	160	45
10000	280	190	370	235	160	59
16000	280	230	370	235	170	72
20000	320	230	420	265	190	86
25000	230	280	420	265	220	100

**TRASFORMATORE
DI SICUREZZA TRIFASE**

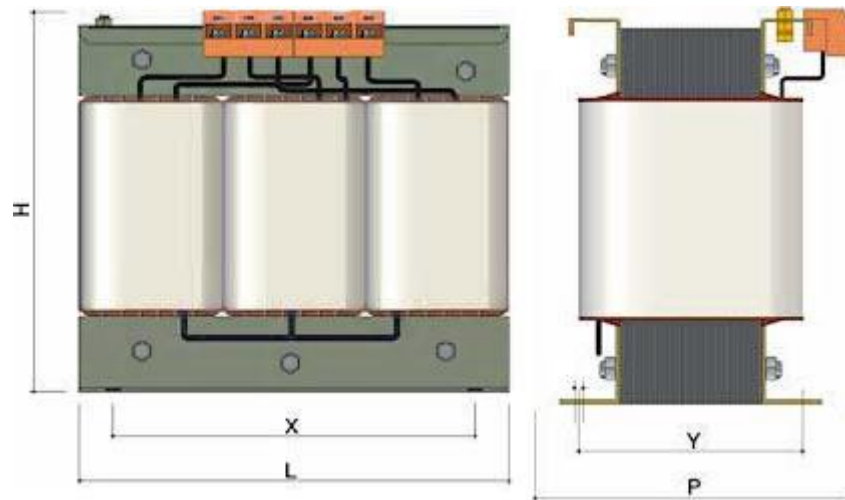


POTENZA VA	L	P	DIMENSIONI H	X	Y	Peso Kg.
300	180	100	180	150	80	6.8
500	180	110	180	150	90	8.3
630	180	120	180	150	100	8.3
1000	180	130	180	150	110	12.5
1600	240	160	230	200	120	17.5
2000	240	180	230	200	140	22.5
2500	240	200	230	200	160	30
3000	300	150	300	250	130	31
4000	300	170	300	250	150	33
5000	300	190	300	250	170	42
6300	360	170	350	325	130	44
10000	360	200	350	325	150	65
12500	420	190	400	375	160	78
16000	420	200	400	375	170	90

**TRASFORMATORE
DI SICUREZZA E COMANDO**

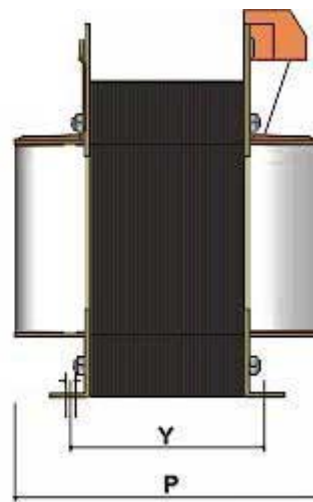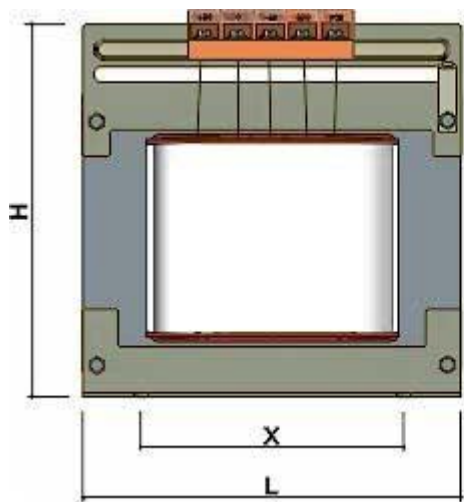


POTENZA VA	L	P	DIMENSIONI H	X	Y	Peso Kg.
25	75	65	78	55	35	0.85
50	75	80	78	55	50	1.10
80	85	80	90	60	52	1.52
100	85	90	90	60	62	1.8
160	96	90	95	68	65	2.15
200	110	72	100	90	60	3
250	110	86	100	90	75	3.50
300	110	90	100	90	75	3.8
400	120	110	130	80	80	4.5
500	120	120	130	80	90	5.3
630	120	130	130	80	100	6.4
800	150	125	170	105	90	7.8
1000	150	145	170	105	100	9
1500	150	175	170	105	130	14.5
2000	180	160	190	130	140	18
3000	180	170	190	130	150	21
4000	200	160	280	150	110	28
5000	200	170	280	150	120	30
7500	240	190	320	205	160	45
10000	280	190	370	235	160	59
15000	280	230	370	235	170	72
20000	320	230	420	265	190	86
25000	320	280	420	265	220	100

TRASFORMATORE
TRIFASE DI ISOLAMENTO

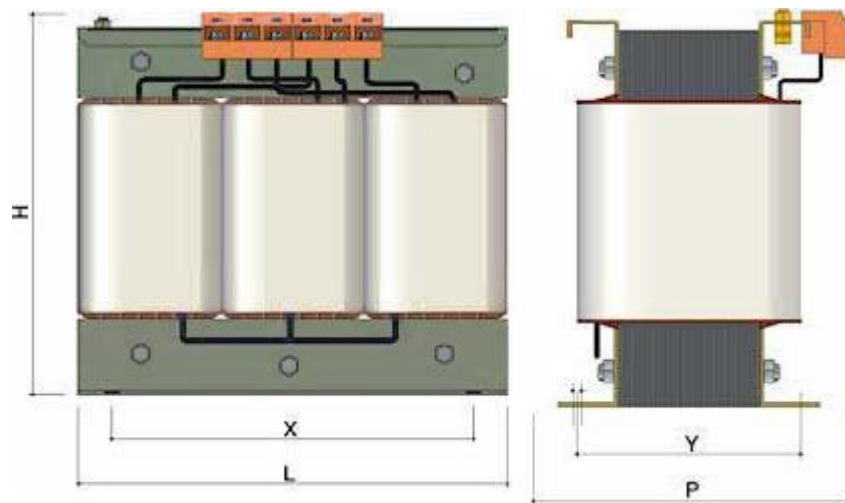

POTENZA VA	L	P	DIMENSIONI		Peso Kg.
			H	X Y	
300	180	100	180	150 76	6.8
500	180	110	180	150 86	8.3
630	180	120	180	150 96	8.3
1000	180	130	180	150 110	12.5
1600	240	160	230	200 120	17.5
2000	240	180	230	200 140	22.5
2500	240	200	230	200 160	30
3000	300	150	300	250 130	31
4000	300	170	300	250 150	33
5000	300	190	300	250 170	42
6300	360	170	300	325 130	44
10000	360	200	350	325 150	66
12500	420	190	410	375 160	78
16000	420	200	410	375 170	90
20000	420	220	410	375 190	120
25000	480	240	470	440 190	150
30000	480	300	470	440 210	175

**TRASFORMATORE
TRIMONOFASE**

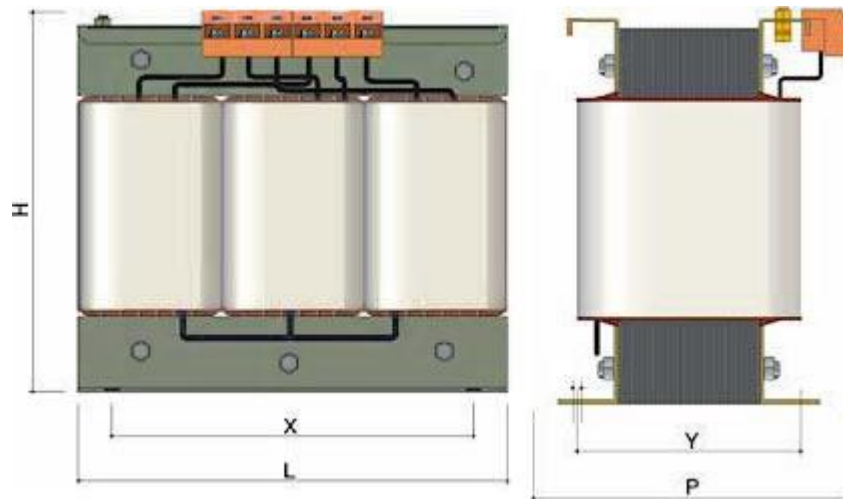

POTENZA VA	L	P	DIMENSIONI H	X	Y	Peso Kg.
500	180	100	170	150	60	7.50
1000	180	130	170	150	90	13
1500	240	180	230	200	80	18
2000	240	200	230	200	100	23
3000	240	230	230	200	117	28
5000	300	200	280	250	90	42
7500	300	220	280	250	110	60
10000	360	240	280	325	120	65
15000	360	230	330	325	140	80
20000	420	240	420	375	130	112
25000	420	250	420	375	140	120